


WELLER

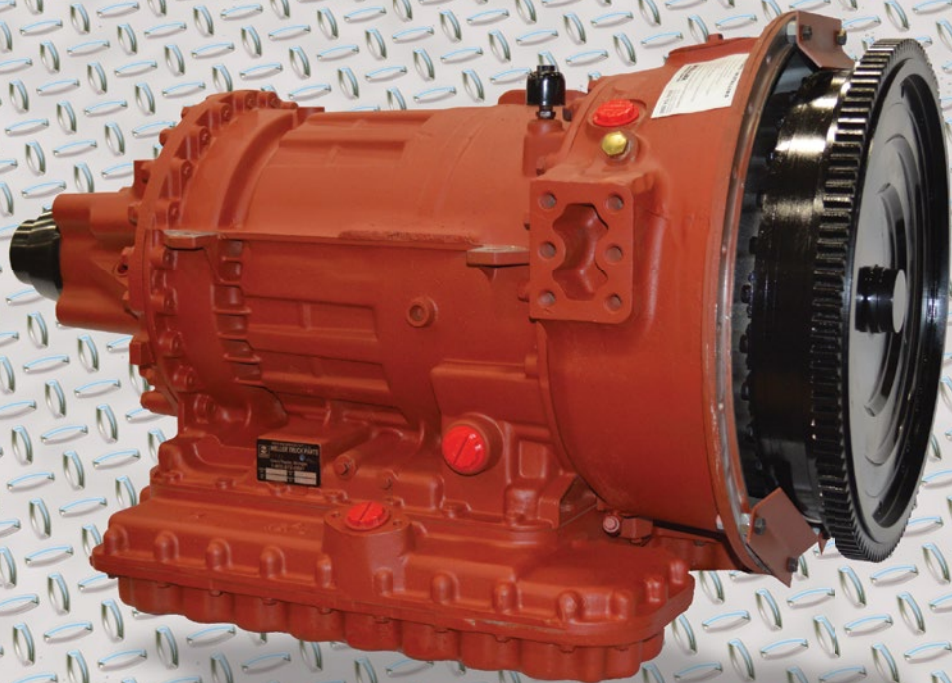

HT700 OWNERS MANUAL

Tag # _____

Mileage In: _____

Date Installed: _____

WELLER
REMAN CENTER

100% Associate Owned

WELLER REMAN



The Nation's Complete Drivetrain Program!

Transmissions and Transfer Cases –

Quality Remanufactured by WELLER in
Grand Rapids, MI.
Light to Heavy Duty.

*Borg Warner • Clark • Cotta • Fuller • FWD
• IHC • Isuzu • Mack/PAI • Meritor/Rockwell
• New Process GMC • New Venture • Noster
• Oshkosh • Spicer/TTC • ZF
A complete line of Auxiliaries and Transfer Cases.*



Allison Transmissions –

Quality Remanufactured by WELLER in
Grand Rapids, MI.
Light to Heavy Duty.

*An Authorized Allison Dealer in
Grand Rapids, MI, remanufacturing off-road
transmissions and components for Allison • Clark
• IHC • Dresser • Funk • Twin Disc • Borg Warner*



Steering Gear Boxes and Pumps –

All units are tested on our state-of-the-art
XLT3 Road Simulator

*TRW-Ross • Saginaw • Sheppard • Vickers Pumps
• ZF • Eaton • Luk*



Differentials –

Complete Stock for quick exchange.

*Clark • FWD • GMC • IHC • Industrial/Off Road
• Mack/PAI • Meritor/Rockwell • Spicer/Eaton
• Terex*



PROGRAM DESCRIPTION



Weller's Unit Exchange program eliminates down time by getting you the parts you need when you need them. With over 17,000 remanufactured transmissions and differentials ready to ship, we can help you eliminate your or your customer's downtime. Consider becoming a key partner in the industry's leading drivetrain program today. With no commitments and no minimums, we are the industry partner for you!

Our aggressive reman program includes:

- All Makes Coverage – One Call
- Same Day Service
- Obsolete and Discontinued Specialists
- 17,000 Unit Stock – It's Available Today!
- Excellent Core Policy (call for details)
- ASE-certified, manufacturer-trained mechanics
- Technical Support on Questions

WELLER REMAN HAS THE ADVANTAGE!

THE WELLER REMAN NETWORK

ALLISON TRANSMISSIONS



- ✓ 100% Genuine Allison
- ✓ Outstanding Availability
- ✓ Quality Remanufacturing
- ✓ Every unit dyno tested
- ✓ New Genuine Allison Torque Converter on all AT Units
- ✓ Quality remanufactured valve bodies matched to original unit
- ✓ Priced for the best value

Two year, unlimited mile warranty
on On-highway applications

*Six month warranty on
Off-highway applications*

*Weller Reman Center,
Grand Rapids, MI is an
Authorized Allison Dealer*

Popular Models

AT540 Series
1000/2000 Series
B400, B500
HD4560, HT740/750
MD3060, MT643.....
EVERYTHING!

Remanufactured by experts in Allison transmissions

THE WELLER REMAN NETWORK

DYNO TESTING



All transmissions are dyno tested with a load to simulate real truck conditions. Every transmission is evaluated to ensure proper torque, accurate shift points, correct main pressure, and applied clutch pressures. Gasket areas are also inspected for leakage during these tests.



THE WELLER REMAN NETWORK

INSTALLATION GUIDE



VEHICLE MAKE AND MODEL _____
MECHANIC'S NAME _____

TRANSMISSION ASSEMBLY NO. _____
VEHICLE ID NO. _____

I. PROPER TORQUE

- Flexplate bolts – ½ X 20: 96-115 ft lb (130-156 N-m), 3/8 X 24: 41-49 Ft lb ☐
- Transmission housing to engine bell housing bolts (Tighten to vehicle manufacturers specifications)..... ☐
- Transmission to frame or mounting bolts – 164-192 Ft lb (223-260 N-m) ☐
- Output flange nut – 600-800 Ft lb (813-1085 N-m)..... ☐
- Companion flange or universal joint bolts (Tighten to manufacturer's specifications)..... ☐
- Manual selector lever nut – 15-20 Ft lb (20-27 N-m). Thread on manual selector shaft changed to metric effective MY 1978, S/N 20542. Nut torque remains unchanged ☐
- Modulator control retaining bolt, early models – 15-20 Ft lb (20-27 N-m); later models – 13-16 Ft lb (18-22 N-m)..... ☐
- Oil filler tube nut – 90-100 Ft lb (122-136 N-m), 4.5" Pans 40-50 Ft lb, If Bolts 14-18 Ft lb..... ☐
- Oil drain plug – 15-20 Ft lb (20-27 N-m)..... ☐
- Speedometer driven gear assembly to rear cover – 45-50 Ft lb (61-68 N-m)..... ☐
- Neutral start switch to transmission housing – 50-60 Ft lb (68-81 N-m)..... ☐
- Reverse signal switch to transmission housing – 4-5 Ft lb (5-7 N-m) ☐
- Parking brake mounting bolts – 164-192 Ft lb (222-260 N-m) ☐
- Oil lines to transmission – 50-60 Ft lb (61-68 N-m)..... ☐
- Bell cranks and cable support brackets to transmission – 54-65 Ft lb (73-88 N-m) ☐

II. OIL COOLER, AIR AND VACUUM LINES

- Check for leaks ☐
- Check for tightness of connections..... ☐
- Check routing of lines..... ☐
- Check for recommended line and fitting sizes (refer to AS45-035 or AS45-038) ☐

III. LINKAGE

Manual Selector

- Check adjustment at all positions (refer to Service Manual, SA 1142, Section IV) ☐
- Check ease of movement..... ☐
- Check neutral safety switch (engine start in Neutral only)..... ☐
- Check shift tower for correct detent and freedom of movement..... ☐

Mechanical Modulator Control

- Check adjustment for proper shift points (full travel 1-3/16 to 1-9/16 in.; 30.16 to 39.69 mm)..... ☐
- Check ease of movement..... ☐
- Check routing..... ☐

Parking Brake

- Adjust for proper clearance ☐
- Adjust for full apply and release ☐



INSTALLATION GUIDE

IV. DRIVELINE

- Check for proper indexing of slip and universal joints ☐
- Determine if angles are within recommendations ☐
- Check for excessive backlash..... ☐
- Lubricate universals and slip joints..... ☐

V. FLUID SYSTEM

- TES 389-295 fluid being used ☐
- Oil level correct for operating conditions..... ☐
- Dipstick properly marked (refer to Mechanic's Tips, MT 1366 Section V)..... ☐
- Filler cap tight and vented ☐
- Filler tube tight at oil pan..... ☐
- Breather clean and free of restriction..... ☐
- Checked for oil leaks during operation..... ☐

VI. POWER TAKE OFF

- Backlash established..... ☐
- Controls connected and operative..... ☐
- Properly coupled to driven equipment..... ☐
- Lube line from transmission properly routed and connected ☐

VII. INSTRUMENTS, ELECTRICAL COMPONENTS

- Speedometer and odometer – operable..... ☐
- Oil temperature and pressure gauges..... ☐
- Wiring and electrical connections – functional..... ☐
- Reverse signal circuit checked ☐

VIII. ROAD TEST VEHICLE

- Refer to Mechanic's Tips, MT 1366, Section VI, for points to check

APPROVED LUBRICANTS



TES-295		Approved Marketer	Product Brandname
Approval Number			
AN-011001		Castrol Heavy Duty Lubricants	TranSynd
AN-031002		BP Lubricants	Autran Syn 295
AN-031003		Cognis Corporation	Emgard 2805
AN-031004		International Truck & Engine Company	Fleetrite Synthetic ATF
AN-051005		ExxonMobil Lubricants and Petroleum Specialties Company	Mobil Delvac Synthetic AFT
AN-071006		John Deere & Company	HD SynTran
AN-1010007		Volvo Trucks North America	Bulldog Synthetic ATF
AN-121009		Case New Holland	CNH HD Synthetic ATF
AN-121008		Shell International Petroleum Co. LTD.	Shell Spirax S6 ATF A295



TES-389				
Product Marketer	Product Brandname	NAmerica	CAmerica	Approval Number
BP Castrol	Castrol ATF Heavy Duty	Yes	Yes	AA-33182010
BP Castrol	Castrol ATF Heavy Duty	Yes	Yes	AA-33192010
BP Lubricants	Castrol Heavy Duty Multi-Purpose ATF	Yes	Yes	AA-32252007
BP Lubricants	Castrol Heavy Duty Multi-Purpose ATF	Yes	Yes	AA-32362007
Chevron Products Company	Chevron Automatic Transmission Fluid HD-389	Yes	Yes	AA-32012007
Chevron Products Company	Chevron Automatic Transmission Fluid HD-389	Yes	Yes	AA-32202007
Chevron Products Company	Chevron Automatic Transmission Fluid HD-389	Yes	Yes	AA-32242007
Chevron Products Company	Chevron Synthetic Automatic Transmission Fluid Heavy Duty	Yes	Yes	AA-31992007
Chevron Products Company	Texaco Automatic Transmission Fluid HD-389	Yes	Yes	AA-32002007
ExxonMobil Lubricants & Petroleum Specialties Co.	Mobile ATF D/M	Yes	Yes	AA-32792008
Fuchs Petrolub AG	Fuchs Titan ATF 4000	Yes	Yes	AA-32822010
Petro-Canada	Petro-Canada ATF D3M	Yes	Yes	AA-32082007
Ravensberger Schmierstoffvertrieb GMBH	Ravenol ATF III H	Yes	Yes	AA-33072010
Shell International Petroleum Co. LTD.	Spirax S2 ATF A389	Yes	Yes	AA-33242011
Shell Lubricants	Donax TA-389	Yes	Yes	AA-32212007
Shell Lubricants	Donax TX	Yes	Yes	AA-32332007

THE WELLER REMAN NETWORK



WHY SHIFT LINKAGE IS IMPORTANT

The shift lever on a transmission moves inside the valve body, which distributes main pressure to the various clutches in the transmission. If the valve is between two clutch ports, main pressure is restricted to the clutches when the valve is operating. This can result in transmission failure.

Typical shift linkage adjustment complaints:

1. Shift lever (in cab) does not line up with the gear selected.
2. Slow engagement to forward or reverse.
3. Truck creeps forward or backward in neutral.
4. Reverse beeper operates intermittently in reverse or in neutral or not at all.

Correction:

One person is needed inside the cab and another person at the transmission shift lever. At the transmission, remove the cotter key or retaining clip and remove the cable clevis pin from the transmission shift lever. Have the person in the cab select each gear with the cable removed. Lock the shifter in each gear while the person at the transmission moves the lever to its corresponding position and reinserts the clevis pin in and out freely. This needs to be done in each gear. If the clevis pin fails to line up with the lever after adjusting, some further diagnosis will be needed. Common issues for these symptoms are a sticking cable, the lever or cable geometry is incorrect, or the lever id is too long or too short. These are just some of the common causes to be checked if this problem would arise.

Why Modulator Adjustment Is Important:

The modulator is an external component attached to the transmission. They are typically mounted to the rear half of the transmission directly behind the shift lever and neutral safety switch. Its function is to vary the shift points depending on the throttle position. In other words, a part throttle condition (i.e. city driving) will result in an “early” or lower up shift and a full throttle condition will result in a “later” or higher up shift. What happens when the modulator is not working properly is an early or too soon up shift at full throttle conditions. You may notice the engine RPM “flare” 200-300 RPM between shifts. Driving a truck that shifts “too soon” will lug the engine and place undue stress on the transmission. Imagine driving a manual transmission truck and you attempt a 3rd or 4th gear shift from a rolling stop. The clutch will try to absorb this load from the output but the clutch will slip if it cannot. This same theory applies with automatics.

There are Four Different Types of Modulators:

1. Cable Operated - One end will attach to the throttle linkage or directly to the accelerator pedal. The transmission end uses a fulcrum to move the modulator pin. This cable will either push or pull to full throttle depending on your vehicles set up.
2. Air - This modulator uses an air signal from the engine governor to move the modulator pin. Williams Controls recommends changing the air modulator at each transmission service (50,000 Miles).
3. Electric - Most commonly used with electronically governed engines where the governor has no mechanical moving parts. Electric modulators are either on or off. They get their signal from the engines ECU or data link translator to move the modulator pin.

(continued on page 10)

WHY SHIFT LINKAGE IS IMPORTANT



(continued from page 9)

4. **Vacuum-** Only used on gas engines. Under full engine load, vacuum will drop off. This signal is relayed to the modulator via a tube or hose, actuating a diaphragm inside the modulator and releasing the plunger outward. Once there is no load, vacuum will return, pulling the plunger back against spring pressure.

Typical Modulator Complaints:

Downshifts Hard

Cable Modulator - Cable at pedal or throttle linkage is not fully returning to its relaxed position. You may need a return spring to help the cable back.

Vacuum Modulator - No vacuum signal or a torn diaphragm in modulator.

Air Modulator - Stuck plunger in modulator or full air pressure under all throttle positions.

Electric Modulator - Power to modulator, under all throttle positions.

Up shifts Hard (low RPM or too early)

Cable modulator - Cable not adjusted correctly or inoperable. To correctly adjust, push or pull the throttle to full fuel. There should be no more than 1/8" slack left in the cable. Keep in mind there are mechanical parts inside the box end of the cable that do wear.

Replacement of the cable may be necessary if adjustment won't cure an early up shift.

Air modulator - Seals inside the modulator have worn allowing air pressure into the case. If there is a lack of air pressure, or too low of pressure, the modulator may not function properly. If you notice oil leaking out the breather, chances are the air modulator is leaking.

Electric Modulator - Modulator malfunction or no power to the modulator. This test will require one person in the cab and one at the transmission. To check, loosen the retaining clip but do not remove. With the ignition key on and the engine off, fully depress the throttle. This should push the modulator away from the transmission if working properly. If there is no movement of the modulator, further diagnosis will be required. Many times the problem is found with the relay or in the vehicle wiring.

A harsh downshift may also be caused by higher than normal idle or slow to return throttle. It may also be caused by a sticky transmission governor valve. An early up shift may be caused by using two o-rings in the modulator valve. This happens quite often as most reman units are shipped with an o-ring already installed in the case. **BE SURE TO ONLY USE ONE "O" RING WHEN INSTALLING MODULATOR OR MODULATOR PLUG!**

ALLISON JOB AID

Allison Job Aid



SHIFT SELECTOR AND CABLE ADJUSTMENT PROCEDURE

For Allison Transmission Models:

1000 Product Family, 2000 Product Family, AT 500 Series, MT 600 Series, HT / CLT 700 Series



The shift cable must be adjusted after the shift selector has been installed in its permanent mounting location, the shift cable routing is finalized, and the cable has been secured.

NOTE: All changes to the shift cable routing, including changes to the shift selector location, will affect the adjustment of the shift cable. Therefore, the shift cable must be readjusted if its routing is modified by a body builder or during transmission or vehicle service.



When properly adjusted, the handle of a lever shifter should be centered in each gate position when the transmission selector shaft is held in place by the internal transmission detent. See Figure C-2.

Follow procedure below to attach and adjust the shift selector cable at shift lever on the transmission.

1. With the engine off, set the park brake and block the wheels to prevent vehicle movement.
2. Place both the shift selector and the transmission selector shaft in the Neutral position.
3. Attach the cable to the shift selector at the operator's station.
4. At the transmission end of the cable, push the cable to move the shift handle against the end of the shift selector Neutral gate. Note the position of the pivot at the end of the cable with respect to the hole in the shift lever. Refer to Figure C-3.
5. Pull the cable to move the shift handle against the opposite end of the shift selector Neutral gate. Note the position of the pivot at the end of the cable with respect to the hole in the shift lever. Refer to Figure C-4.
6. Center the position of the cable at the midpoint of the travel determined by Steps 3 and 4. See Figure C-5.

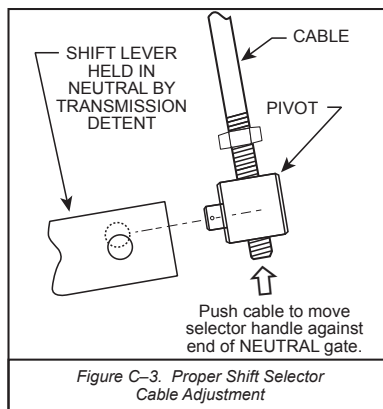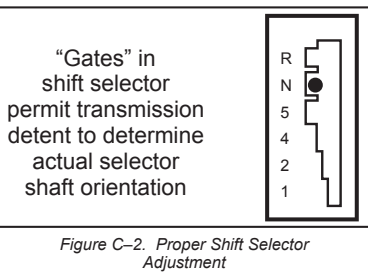

ALLISON JOB AID

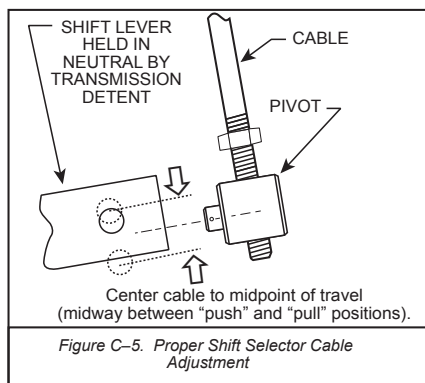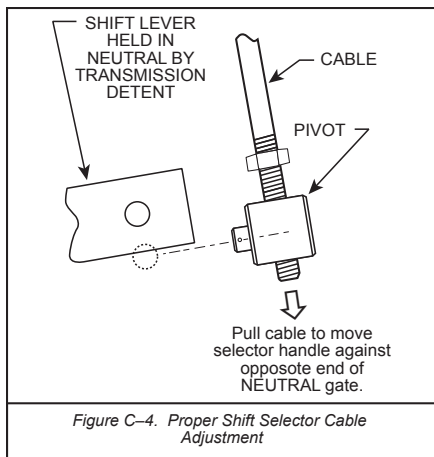


7. Holding the cable at the position determined in Step 5, rotate the pivot on the threaded section of the cable end until it is aligned with the hole in the shift lever. See Figure C-6.

8. Verify that the attachment pin of the pivot does not bind in the shift lever hole and that the detent in the transmission is positively engaged. This condition is sometimes called "free-pin-fit," referring to lack of friction at the cable / shift lever interface once the transmission detent is engaged. Repeat Steps 4 through 6 as necessary to create this condition.

9. Attach the pivot to the shift lever and secure with the lock pin. If a jam nut is provided with the cable hardware, torque the jam nut to lock the pivot to the cable end as noted in Figure C-6. If the cable manufacturer does not provide a jam nut with the cable assembly, do not add one during the installation process.

CAUTION: Once the jam nut is tightened, the pivot pin should slide freely into the hole in the lever. Do not twist the cable to insert it into the lever. Loosen the jam nut, reorient the pivot to insert freely into the lever, then tighten the jam nut again.

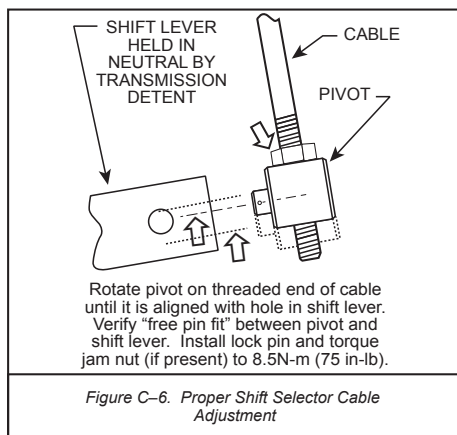

10. Once this attachment is made, move the selector through all the range positions at the operator's station. Verify that free-pin-fit exists in each range position, and that the position of the shift lever is determined by the internal transmission detent — not by tension or compression on the shift cable. Special attention should be devoted to the free-pin-fit in the Neutral position, in the lowest forward range (1), and, if available, in the Park or Park Brake position.

SERVICE TIPS

FLUID LEVEL



Fluid Types:

Use TranSynd™ or Dexron-III® for general vocations and C-4 qualified fluids for off-highway vocations.

Checking Fluid:

Cold Check:

Temperature 60–120 °F (16–49 °C)

Fluid Level Within (Cold Run) Reference Fill

Hot Check:

Temperature 160–220 °F (71–104 °C)

Fluid Level Within Hot Run

- Vehicle on level surface, parking brakes applied (wheels chocked)
- Engine at idle
- Transmission in N (Neutral)
- Add or drain fluid as necessary

Fluid Change Interval (Non-TranSynd™):

Refer to SIL 10-TR-99 for change intervals for Non-TranSynd™/Non-TES 295 or a mixture of Non-TranSynd™/Non-TES 295 and TranSynd™/TES 295 fluids.

Refer to 10-TR-98 for off-highway fluid applications.

Fluid Change Interval - General Vocations (TranSynd™/TES 295) Fluid)

Transmission	Fluid Change Interval	Main/Internal Filter	Lube/Auxiliary**
AT 500 Series	100,000 miles*(160 900 km) 48 months /4000 hours	Main – N/A	50,000 miles*(80 400 km)
		Internal Wire Mesh – 100,000 miles*(160 900 km) 48 months/4000 hours	24 months /2000 hours
MT 600 Series	100,000 miles*(160 900 km) 48 months /4000 hours	Polyester – overhaul	50,000 miles*(80 400 km) 24 months /2000 hours
		Main – N/A Internal – overhaul	50,000 miles*(80 400 km) 12 months /1200 hours
HT 700 Series	100,000 miles*(160 900 km) 48 months /2400 hours	50,000 miles*(80 400 km) 12 months /1200 hours Internal –overhaul	

* Whichever occurs first

** Use an Allison high-efficiency filter until the Change Filter light indicates it is contaminated or until the filter has been in use for 3 years. No mileage restrictions apply.

Fluid Change Capacity


Transmission	Pan Depth	Capacity (External Circuits Not Included)
AT 500 Series	3.8 inches / 97 mm	9 quarts / 8.5 liters
	5.3 inches / 135 mm	16 quarts / 15 liters
MT 600 Series	4.3 inches / 108 mm	12 quarts / 11 liters
	5.0 inches / 127 mm	15 quarts / 14 liters
	7.0 inches / 178 mm	17 quarts / 16 liters
HT 700 Series	4.5 inches / 114 mm	34 quarts / 32 liters
	6.0 inches / 152 mm	30 quarts / 28 liters
	7.0 inches / 178 mm	30 quarts / 28 liters
	8.5 inches / 216 mm	43 quarts / 41 liters
Transfer Case		26 quarts / 25 liters (Use C-4 SAE 30 Fluid)

SERVICE TIPS




SHIFT SELECTOR LINKAGE

Checks:



- Hold lever
- Torque 15–20 lb ft (20–27 N·m)
- Clean and lubricate all moving joints

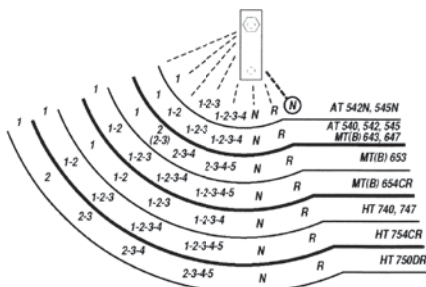


Adjustments:

Be sure the selector lever moves easily and is properly positioned by the transmission detents.


- Check Neutral Start Switch. The engine starter must not operate in any shift selector position except N (Neutral).

VACUUM MODULATOR *Be sure there are no leaks in the vehicle vacuum system*

Checks:

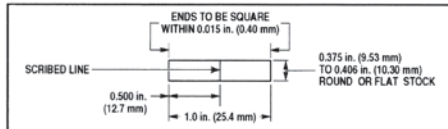


- Spring strength using fabricated tool
- Known good modulator and modulator being tested
- Squeeze modulators together until either modulator touches scribed line
- Maximum gap between modulator sleeves to qualify modulator as being tested — 0.060 inch (1.52 mm)



- Modulator diaphragm
- Obtain 10 inches (254 mm) of vacuum
- Hold vacuum for 15 seconds


Adjustments:




- Modulator neck 10° down from oil pan splittine.
- Torque retaining bolt to 10–16 lb-ft (14–22 N·m)

MECHANICAL MODULATOR

Checks:

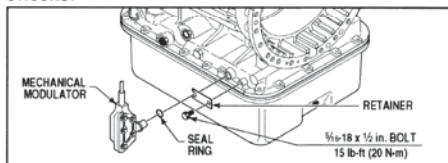


- Check cable routing. Bends in cable must be no less than 8.0 inch (203.2 mm) radius.
- Cable should be no closer than 6.0 inches (152.4 mm) to the engine exhaust pipe or manifold.

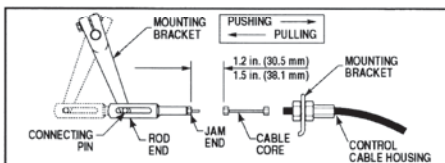

- Connecting pin must pivot freely in hole through throttle lever and slot in rod end.
- Full to closed throttle positions, cable travel 1.187 inches (30.15 mm) to 1.560 inches (39.6 mm).
- Adjust as required

PNEUMATIC MODULATOR


Checks:



- Apply 80 psi (552 kPa)
- Submerge in water.
- Leaks are not permitted.

ELECTRIC STEP MODULATOR *Do not ground electrical modulator to transmission*

Checks:



- Connector tightness
- Routing of electrical wires away from the engine exhaust or manifold. Electrical wiring should be no closer than 6.0 inches (152.4 mm) to the engine exhaust pipe or manifold.
- Routing of electrical wires to avoid strain on connections and chafing of the wires.



CORE RETURN INSTRUCTIONS

The Weller Truck Parts core return program is designed to facilitate an efficient and cost effective way of returning your cores. Following the instructions listed below will insure your core is processed quickly and correctly.

1. Attach the Core Return Tag provided with the remanufactured unit to core.

- For warranty units, obtain a Warranty Repair Authorization (RA#) from your Weller Truck Representative. If you are not sure who your representative is call the Reman Center at 1-800-872-6697 or email warranty@wellertruck.com.

2. Prepare the unit for shipping.

- Drain oil from unit.
- Band, wrap, or strap unit(s) to a pallet.
- Attach a copy of the warranty invoice, core tag or RA# to the unit for identification.

3. Notify Weller Shipping Department when unit is ready for pick up.

- Email corereturn@wellertruck.com or call 1-800-872-6697 Ext. 3794 or 3759
- Provide the following:
 - ◆ Core return tag # or Weller Truck Parts invoice # or the RA# if the unit is a possible warranty
 - ◆ Your contact information
 - ◆ Hours of operation
- Weller will prepare the bill of lading and schedule your unit to be picked up by a Weller approved carrier.

Thank you for choosing Weller Truck Parts.



Failure to follow these procedures could result in core credit delays and freight charge backs.

www.wellertruck.com

THE WELLER REMAN NETWORK

WELLER WARRANTY



WARRANTY STATEMENT

- **Nationwide**
- **Two Year Coverage**
- **Unlimited Mileage**
- **800-872-6697 Tech Line For Troubleshooting**
- **Call For Authorization And Assistance**
- **Metal tag must not be removed or warranty will be void**

Warranty Coverage

Standard Warranty Coverage

Weller Reman Allison Transmissions for *"on-highway" applications* – Two year, unlimited mileage – parts and labor. Weller Reman Allison Transmissions for *"off-highway" applications* – Six months, unlimited hours – parts and labor.

Authorized Repair Points – Our Nationwide Warranty may be administered only by an authorized warranty repair facility. Call 1-800-872-6697 for authorization.

Exclusions – Subject to the conditions stated herein, Weller warrants to the original retail purchaser thereof that its Reman products will, when used in a motor truck for on-highway or on/off-highway applications in the United States and properly installed and assembled on vehicles approved by the O.E.M. for such purpose, be and remain under normal conditions of use and operation free from failure due to defects in materials and workmanship from the date of sale.

This warranty covers parts and labor to repair or replace, at Weller's option, the failed Weller component. Units installed as replacements under this warranty are warranted only for the remainder of the original warranty period.

This warranty shall not extend to failures or damage due to improper lubrication or operation in excess of original design limitations, failure to follow normal published preventive maintenance guidelines of the O.E.M., abuse or damage by improper installation, casualty or shipment.

This warranty shall not extend to repairs for noise (including idle rattle), excessive operating temperature, transmission rear seal leakage, nor does it cover failures caused by engine, clutch, driveline; including transmission synchronizer pin breakage, or other truck components or system.

This warranty does not cover failures caused by a worn, damaged or defective part or component mounted to the unit by the dealer or retail purchaser, including without limitation, the transmission end yoke.

All warranty claims shall be made to Weller and shall be supported by satisfactory evidence in respect of the conditions stated herein. As a condition precedent to the allowance of such claims, the component or assembly involved shall, if requested by Weller, be returned prepaid to Weller for examination.


EXCEPT FOR THE EXPRESS WARRANTY STATED HEREIN, WELLER DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE FOREGOING IS THE LIMIT OF THE LIABILITY OF WELLER, AND IS THE EXCLUSIVE AND SOLE REMEDY OF THE PARTY TO WHOM THIS WARRANTY IS MADE. LIABILITY ON THE PART OF WELLER FOR DAMAGES, EXPRESSLY INCLUDING CONSEQUENTIAL DAMAGES IS DISCLAIMED.

This warranty may not be changed or modified in any way except in writing by Weller.



WELLER WARRANTY

CALL WELLER FIRST!

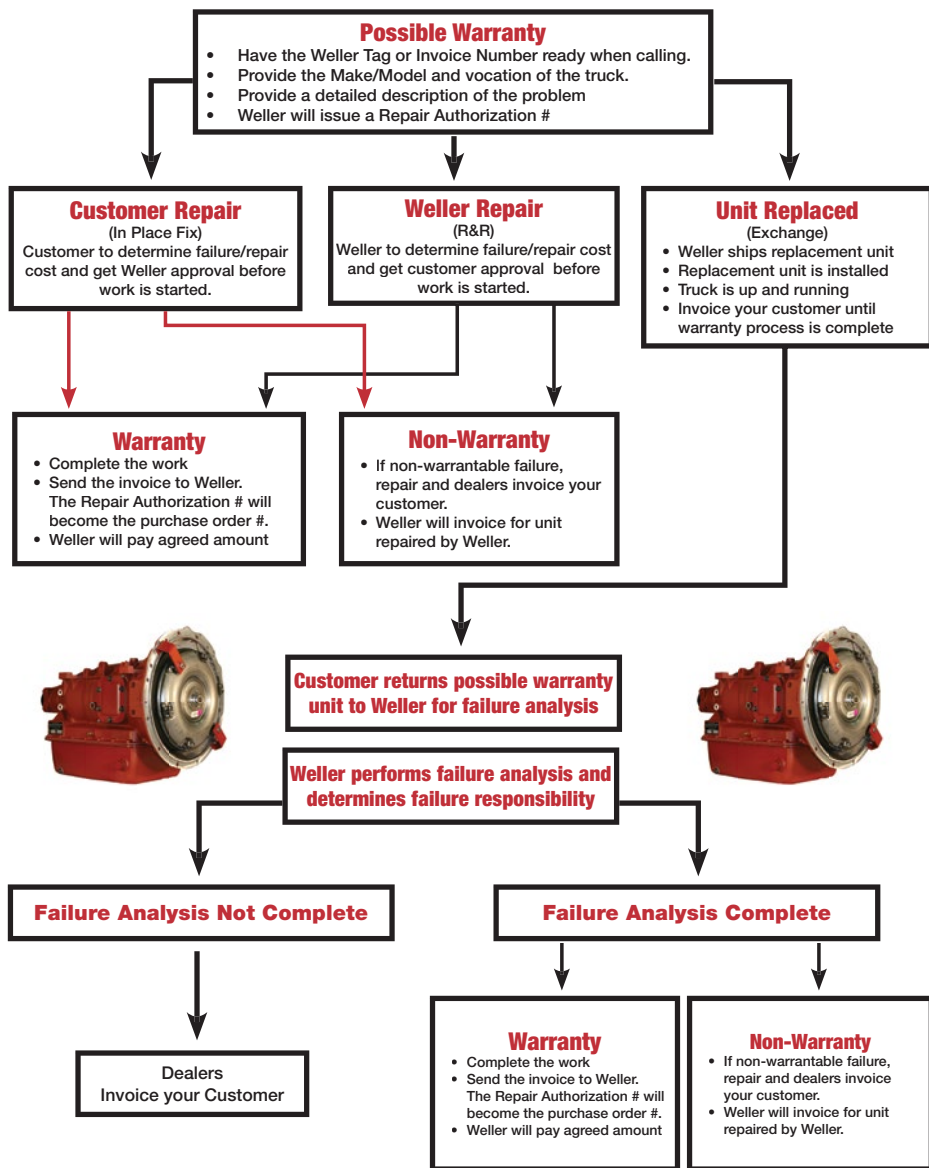

THE WELLER REMAN NETWORK

WARRANTY CLAIM FORM1500 Gezon Parkway SW
Grand Rapids, MI 49509
616-724-2000
800-872-6697
Fax 616-365-5679

Date: _____

TAG #: _____

Claim Contact Information:	Vehicle Owner Information:	Truck Information:
Name, Company, and Address: _____ _____ _____	Name, Company, and Address: _____ _____ _____	Make: _____
Phone: _____	Phone: _____	Model: _____
Fax: _____	Fax: _____	Mileage: _____
E-Mail: _____	E-Mail: _____	Vocation: _____
		Engine: _____
		VIN: _____

COMPLAINT

		Description of the Problem:
Fluid Leak:	<input type="checkbox"/> Yes <input type="checkbox"/> No	_____ _____ _____ _____ _____ _____ _____ _____ _____ _____
Shifting:	<input type="checkbox"/> Yes <input type="checkbox"/> No	
Noise:	<input type="checkbox"/> Yes <input type="checkbox"/> No	
Vibration:	<input type="checkbox"/> Yes <input type="checkbox"/> No	
Hard Steering:	<input type="checkbox"/> Yes <input type="checkbox"/> No	
Contamination:	<input type="checkbox"/> Yes <input type="checkbox"/> No	
Other:	<input type="checkbox"/> Yes <input type="checkbox"/> No	

ADDITIONAL INFO

Change with Speed?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Suspension Modified Recently?	<input type="checkbox"/> Yes <input type="checkbox"/> No
Change with RPM?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Driveline in Phase?	<input type="checkbox"/> Yes <input type="checkbox"/> No
During Acceleration?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Engine Mounts Checked?	<input type="checkbox"/> Yes <input type="checkbox"/> No
During Deceleration?	<input type="checkbox"/> Yes <input type="checkbox"/> No	King Pin Checked?	<input type="checkbox"/> Yes <input type="checkbox"/> No
When Stationary?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Hydraulic Brakes?	<input type="checkbox"/> Yes <input type="checkbox"/> No
Fluid at Proper Level?	<input type="checkbox"/> Yes <input type="checkbox"/> No	System Flushed & Filter Replaced?	<input type="checkbox"/> Yes <input type="checkbox"/> No
Fluid Clean?	<input type="checkbox"/> Yes <input type="checkbox"/> No		
Is the Unit Getting Hot?	<input type="checkbox"/> Yes <input type="checkbox"/> No		
Vehicle Towed?	<input type="checkbox"/> Yes <input type="checkbox"/> No		
Running PTO?	<input type="checkbox"/> Yes <input type="checkbox"/> No		

EMAIL TO: WARRANTY@WELLERTRUCK.COM
FAX TO: 616-365-5679, WELLER TRUCK PARTS WARRANTY



WELLER WARRANTY

Warranty


It is essential that Weller is contacted before the unit is removed from the vehicle for warranty. Weller's technician will assist in troubleshooting the problem. If the unit failed, the unit will be filmed, documented, and warranty determined.

The following are the maximum flat rates for failures due to defective products or workmanship:

- Units do not have to be installed at a Dealer to receive flat rate warranty
- Flat Rate Warranty is available on over the counter sales

The following table shows warranty flat rates for Allison transmissions:

Allison Model	Flat Rate Credit
1000 SERIES GM APPL	\$500
1000 SERIES STD APPL	\$500
2000 SERIES	\$500
2400 SERIES	\$500
AT540, 542, 542N, 545	\$500
AT545N, 545R	\$500
B400R	\$800
B500	\$800
B500R	\$800
HD4060, HD4060P, HD4560	\$800
HT70, HT740, HT740RS	\$800
HT750, HT750CRD, HT750DRD	\$800
HT754, HT754CR, HT754CRD	\$800
MD3060, MD3060P, MD3066P	\$700
MD3560, MD3560P	\$700
MT640, MT643	\$600
MT650, MT653	\$600
MT654	\$600

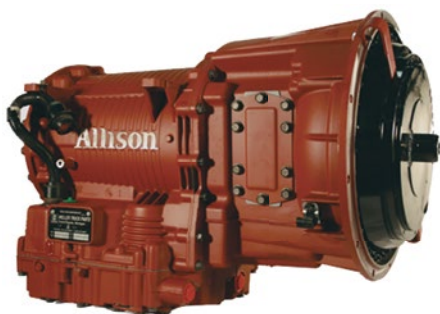

Authorized Weller Dealers call for warranty labor hours guidelines.

THE WELLER REMAN NETWORK

THE WELLER REMAN NETWORK



1 Reman Center

1500 Gezon Pkwy S.W.
Grand Rapids, MI 49509
616-724-2000
800-872-6697

2 Atlanta, GA

5007 Clark Howell Highway,
Suite A
Atlanta, GA 30349
404-768-9577
877-768-9577

3 Baltimore, MD

899 Airport Park Rd., Ste. N
Glen Burnie, MD 21061
410-553-0443
877-550-0443

4 Birmingham, AL

116 Total Solutions Way
Alabaster, AL 35007
205-685-0777
866-535-0777

5 Boise, ID

8484 W. Victory Road
Boise, ID 83709
208-331-1061
888-331-1061

6 Chicago, IL

11152 Southwest Highway
Palos Hills, IL 60465
708-974-9919
888-974-9319

7 Columbus, OH

2885 International St.
Columbus, OH 43228
614-771-9500
866-771-9501

8 Dallas, TX

3113 Skyway Circle N
Irving, TX 75038
972-258-0460
855-258-0460

9 Detroit, MI

29826 W. Eight Mile Road
Farmington Hills, MI 48336
248-473-1900
800-473-1905

10 Gaylord, MI

353 Expressway Court
Gaylord, MI 49735
989-731-6700
888-731-6700

11 Houston, TX

4549 Aldine Bender
Houston, TX 77032
281-442-8855
877-677-8855

12 Jacksonville, FL

10330 Chedok Court
Suite 205
Jacksonville, FL 32218
904-757-0777
888-474-0777

13 Las Vegas, NV

2985 Coleman St., Suite 14
North Las Vegas, NV 89032
702-638-8222
866-764-8222

14 Los Angeles, CA

9355 Cherry Ave.
Fontana, CA 92335
909-356-8322
877-356-8322

15 Milwaukee, WI

8625 North 107th
Milwaukee, WI 53224
414-354-6400
877-354-6400

16 Minneapolis, MN

3201 85th Avenue North
Brooklyn Park, MN 55443
763-424-3800
877-424-3802

17 Nashville, TN

230 Molly Walton Drive
Hendersonville, TN 37075
615-264-2750
866-426-2750

18 Omaha, NE

8623 S. 117th St.
LaVista, NE 68128
402-597-9000
855-597-9001

19 St. Louis, MO

2388 Chaffee Drive
Maryland Heights, MO 63146
314-692-2227
877-992-2227

20 Seattle, WA

6408 South 196th Street
Kent, WA 98032
253-872-0321
877-572-0321

21 South Bend, IN

3303 William Richardson Ct.
Suite 200
South Bend, IN 46628
574-237-1000
800-968-8860

22 Tampa, FL

217 Hobbs Street
Suite 103
Tampa, FL 33619
813-685-6100
866-685-6109

23 Salt Lake City, UT

3450 W. California Ave.
Suite 400
Salt Lake City, UT 84104
801-886-0100
855-847-0100

24 Denver, CO

Drive Train Industries